



16.0 - BONDED "G" CONNECTION

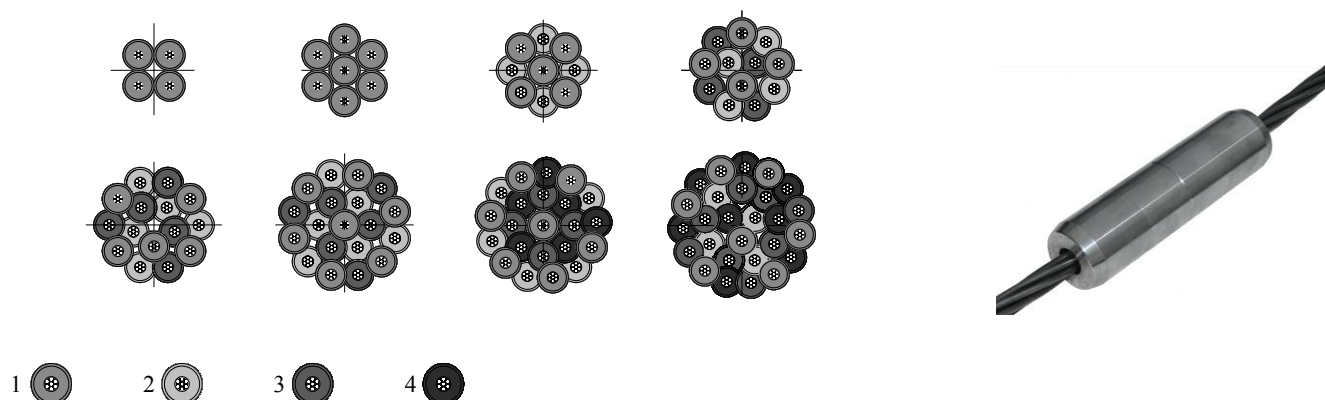

Joints "G" series are designed to allow members of splicing cables during the construction of bridges in progress, casting and shooting joints of cables. The pair made their sleeves monotrefolo with internal pre-loaded terminals with spring-loaded device.

The device is made of multiple layers of offsetting the sleeves to contain the same cable size containable in a tube in a spiral metal sheath with injection /vent.

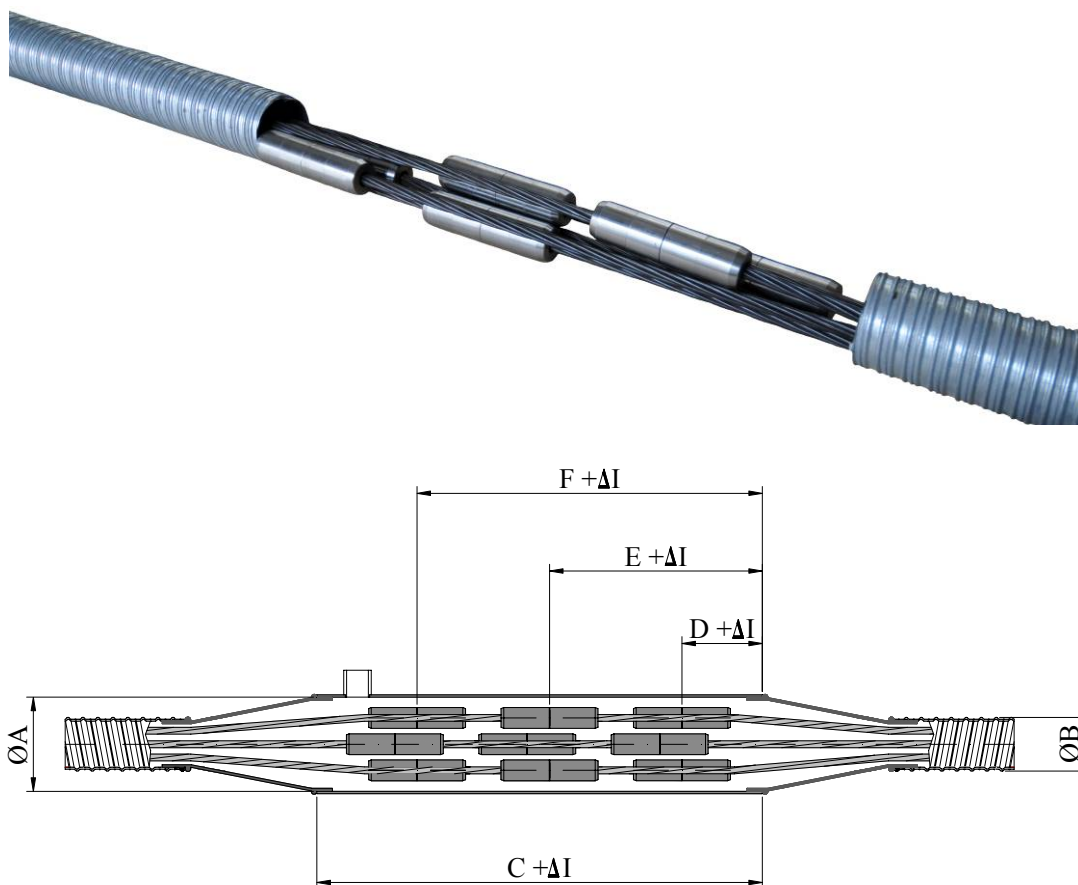

| Type | A (mm.) | B (mm.) | C (mm.) | D (mm.) | E (mm.) | F (mm.) |
|-------|------------|------------|------------|------------|------------|------------|
| 4G15 | 140 | 45/50 | 675 | 300 | 800 | |
| 7G15 | 159 | 62/67 | 800 | 340 | 800 | |
| 9G15 | 177 | 72/77 | 950 | 400 | 800 | 1.200 |
| 12G15 | 193 | 80/85 | 1250 | 400 | 800 | 1.200 |
| 15G15 | 193 | 85/90 | 1250 | 400 | 800 | 1.800 |
| 19G15 | 193 | 95/100 | 1300 | 400 | 800 | 1.800 |
| 22G15 | 219 | 100/105 | 1385 | 400 | | |
| 27G15 | 244 | 110/115 | 1700 | 400 | | |

The company reserves the right to change products and specifications without notice.

(Measures in mm.)