


22.0 - ANCHORAGES FOR M AND D PREASSEMBLED SLABS



4D15 anchorage

For use on slabs, preassembled cables can be supplied with the passive anchorage preblocked at one end, which are ready for the installation on site and assembled from factory.

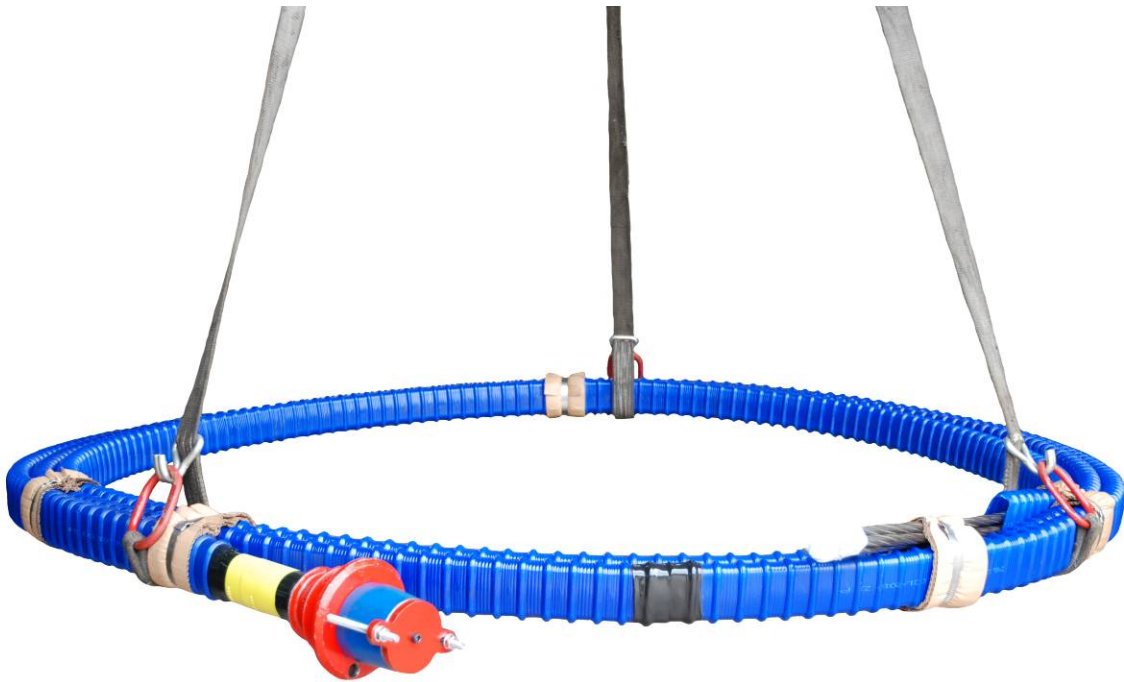

Cables are cut to size and are provided with a polyethylene corrugated sheath, all sealed and ready for the installation.



Cables are provided with proper fastenings that allow to lift and handle them without damaging the sheath, which is made of polyethylene to allow rolling up.



Sheaths are sealed by means of heat-shrinking elements in order to guarantee continuity and seal.

23.0 - ANCHORAGES FOR PREASSEMBLED L SLABS




4/5L15 anchorage

For use on slabs, preassembled cables can be supplied with the passive/active anchorage preinstalled at one end, which are ready for the installation on site and assembled from factory.



Cables are cut to size and are provided with a polyethylene corrugated sheath, all sealed and ready for the installation.

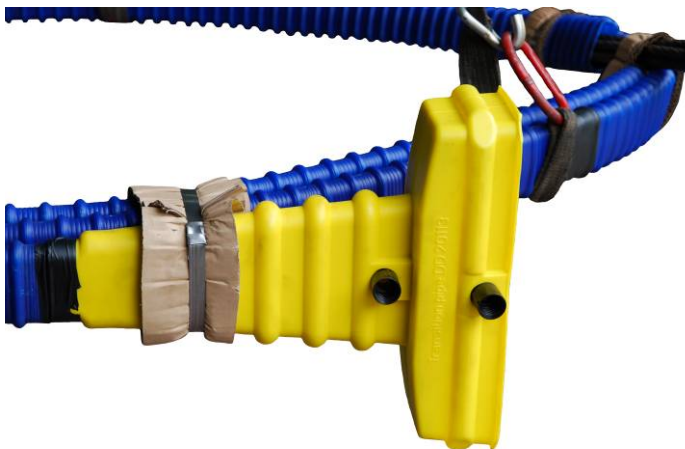

Cables are provided with proper fastenings that allow to lift and handle them without damaging the sheath, which is made of polyethylene to allow rolling up.



Sheaths are sealed by means of heat-shrinking elements in order to guarantee continuity and seal.