



## 17.0 - ENCAPSULATED UNBONDED "GX" CONNECTION

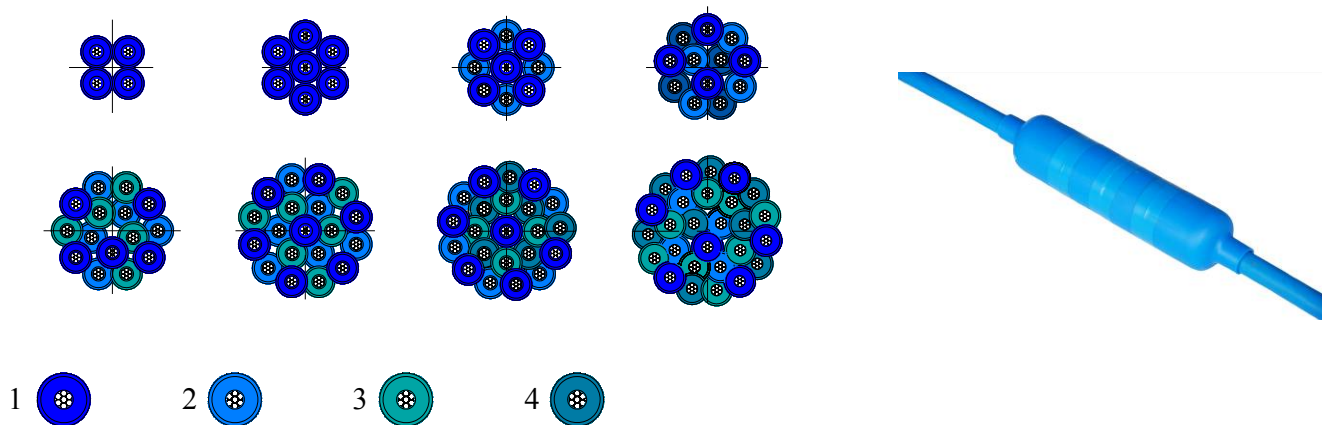

Joints "G" series were created encapsulated in the "GX" solution designed to allow single or multi stranded cables spliced in the non-adherent, while building bridges in progress, casting and shooting joints of cables. The coupling is achieved with linear monotrefolo encapsulated, with their internal pre-loaded terminals with spring-loaded device, the whole is encapsulated in polyethylene is fat. The device is made of multiple layers of offsetting the sleeves so as to contain the same information contained in a cable size and compatible with the application. The fuel injection system does not require the application being non-adherent, he is cast in the cast assembled.

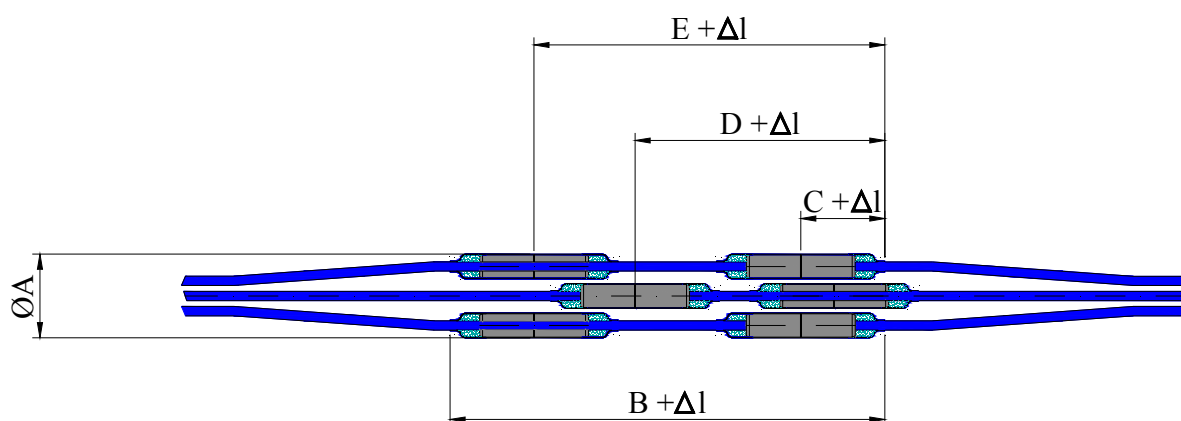

Type	A (mm)	B (mm)	C (mm)	D (mm)	E (mm)	F (mm)
4GX15	140	45/50	675	300	800	
7GX15	159	62/67	800	340	800	
9GX15	177	72/77	950	400	800	1.200
12GX15	193	80/85	1250	400	800	1.200
15GX15	193	85/90	1250	400	800	1.800
19GX15	193	95/100	1300	400	800	1.800
22GX15	219	100/105	1385	400		
27GX15	244	110/115	1700	400		

The company reserves the right to change products and specifications without notice.

(Measures in mm.)